



AGROMEKS  
AGRICULTURAL MACHINERY

PRODUCT CATALOG

[www.agromeeks.com](http://www.agromeeks.com)  
+90 850 242 4445



# agromeks

• TAŞ TOPLAMA • TAŞ KIRMA • KATI GÜBRE RÖMÖRKÜ  
**TARIM MAKİNALARI**

**As Agromeks Agricultural Machinery family, we have 70 years of experience.**

**Located in Konya/Akşehir Organized Industrial Zone**

**Our state-of-the-art equipment in our production facilities with an area of 35,000 m2.**

**We manufacturing; Stone Collector, Stone Crusher,**

**Solid Manure Spreaders and Beach Cleaner Machines**

**With Our R&D team, our innovative marketing department,**

**72 dealers and service network, all countries.**

**We offer fast service, 24/7 available customer representative after sales**

**We serve our farmers / users with the understanding of.**



agromeks



# JAGUAR STONE PICKER

GREEN TECHNOLOGY

GREEN WORLD!

The Spring Drum Bearing System  
Protects the machine from stone jams,  
While at the same time it ensures  
That stones of large diameter and weight are collected  
without difficulty.



SPRING DRUM BEARING SYSTEM

Stone Collectors have become the most important tool in the agricultural sector for making the lands suitable for agriculture. It collects the stones found up to 30 cm deep from the surface of its lands with its spring sieve and spring drum system, while at the same time taking on the task of cultivating your soil.

It collects stones with an average diameter of 3cm up to 45cm.

Thanks to the spring sieve, spring drum system and intermittent storage sheet, it does not collect soil and mud.

Provides long blade life with Hardox material.

Reliable specially designed gearbox system does not cause problems as long as oil maintenance is delayed, it has a long life.

Easily replaceable blade and spring system allows blade and spring replacement without the need for service.

The field type hydraulic lift tank system with a discharge height of 2.6 m

offers the possibility of unloading to the desired vehicle and area.

Our 140cm, 175cm, 200cm garden and field models offer a machine option suitable for every tractor and every terrain.


The stone picker is used in many industrial areas such as the tourism sector to clean

the beach as well as agricultural lands.

Automatic chain tensioner  
Protects the chain and  
The entire operating mechanism.



AUTOMATIC CHAIN TENSIONER

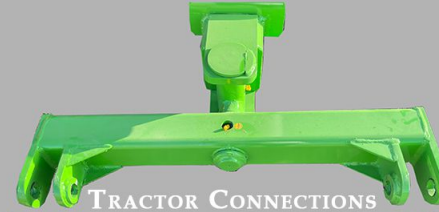

TRACTOR CONNECTIONS

Specially designed hydraulic front link arms,  
produced using strong materials,  
are resistant to heavy weights and strains.

The spring sieve system protects the machine from  
possible stone jams and also ensures  
better sieving of mud and soil by vibrating.



Spring Sieve System

DIFFERENT MODELS

FOR ALL TRACTORS

140CM

175CM

200CM





AGROMEKS

# JAGUAR STONE PICKER

Model 200	Model 175	Model 140			
30-35 cm	30-35 cm	30-35 cm	(عمق العمل) كحد أقصى	Working depth (Max.)	Çalışma Derinliği (Max.)
520 cm	520 cm	520 cm	الطول	Length	Uzunluk
280 cm	255 cm	225 cm	عرض المسار	Path width	Yol Genişliği
255 cm	255 cm	255 cm	الارتفاع	Height	Yükseklik
200 cm	175 cm	140 cm	عرض العمل	Working width	Çalışma Genişliği
260 cm	255 cm	255 cm	ارتفاع الخزان	Storage height	Depo Yüksekliği
3 - 35 cm	3 - 35 cm	3 - 35 cm	قطر الحجر Min/Max	Min/Max diameter of collected stones	Min / Max Taş Çapı
Max. 8500 kg	Max. 6000 kg	Max. 4500 kg	سعة الخزان	Storage capacity	Depolama Kapasitesi
80-90HP	60-80HP	50-65HP	قوة الجرار المطلوبة	Required tractor power	Gerekli Traktör Gücü
3850 kg	3525 kg	2800 kg	الوزن	Weight	Ağırlık
Vibrasyonlu Yaylı Elek ve Tambur Sistemi / Vibratory spring screen and drum system /					

# LEOPAR

## STONE CRUSHER

GREEN TECHNOLOGY


GREEN WORLD!

Stone Crushers make stony lands suitable for agriculture, while enriching the soil in terms of minerals. 20 cm working depth; with a working width of 150 cm, 170cm options allows crush the stones in their fields. It is used in the industrial field around the world, from fields, orchards, greenhouses, vineyards, beaches and agriculture. 34 pieces of Carbide blades provide long-lasting working opportunity. Durability is maximized with Hardox chassis and body, and faultless operation is aimed even in the toughest conditions. It has a specially produced Italian gearbox. We work with advanced technology equipment in our facilities for a well-balanced rotor.



150CM  
170CM

Specially designed hardox blade holders, rotor architecture suitable for high speed operation, long blade life and rotor arrangement resistant to harsh conditions.

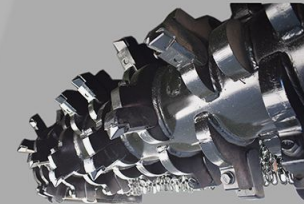


SPECIALLY DESIGNED  
34-BLADE ROTOR ARRANGEMENT

Italian designed and manufactured gearbox, resistant to harsh conditions, assured by Comer Industries...



ITALIAN GEARBOX



CARBIDE BLADES

Carbide tooth/blade, Italian Design. Boiled by induction. The most suitable material for working with stone. Excellent compatibility of carbide with cast steel. Long blade life. Easy exchange.

Assured by Hardox Wear Plate

**HARDOX**<sup>®</sup>  
WEAR PLATE

CARBIDE BLADES

COMER INDUSTRIES' GEARBOX





AGROMEKS



# LEOPAR STONE CRUSHER



İş genişliği	Working width	150cm	170 cm
Toprak işleme derinliği	Working depth	Max:20cm	Max. 20 cm
Çalışma hızı	Working speed	0,3-2 km/sa	0,3-2 km/hr
Makine ağırlığı	Machine weight	1465 kg	1665 kg
Makine genişliği	Machine width	178cm	198 cm
Makine uzunluğu	Machine length	115cm	115 cm
Makine yüksekliği	Machine height	130cm	130 cm
Kırcı bıçak sayısı	Total number of blades	34 adet	34
Kırcı bıçak özelliği	Blades feature	Bor Karbür	Boron Carbide
Makine iç kaplaması	Machine inside coating	Hardox v.b.	Hardox
Kırcı bıçak pozisyonu	Blades position	Helis	Helix
Kuyruk mili devri	PTO speed	540d/sa	540 rpm
Makine arka kapak	Machine rear door	Hidrolik	Hydraulic
Yağ pompası güç kaynağı	Oil pump power supply	Traktör	Tractor
Güç gereksinimi	Required tractor	Min:80hp	Min. 85 HP
Gerekli traktör özelliği	Tractor feature	Süper Sürünger vites	Creep speeds
Garanti Süresi;	Warranty period	2 Yıl	2 Years

  
agromeks

# PANTER

## SOLID MANURE SPREADER

GREEN TECHNOLOGY


GREENWORLD!

Solid Manure Spreaders provide homogeneous distribution of animal solid manure to the fields.  
 Our 10m<sup>3</sup> and 5m<sup>3</sup> models have a capacity of 12tons and 7tons.  
 Thanks to the specially designed single and double axle tandem scissor system, it provides low fuel consumption, easy driving and use, even in tractors with low horsepower without overload on the tractor.  
 It provides a working area of 90m<sup>2</sup> with the possibility of throwing up to 15 meters.

Double Row Chain Conveyor System carries the fertilizer homogeneously to the distribution system.  
 12mm heat treated chains stone etc. resistant to objects.



DOUBLE ROW CHAIN CONVEYOR SYSTEM



DOUBLE TRAY AND SWIPE DISPENSER SYSTEM

Double Tray , Swipe Dispensers up to 15 meters  
 Provides spread disposal facility.



POWERFUL TRANSMISSION,  
 POWERFUL MACHINE!

Our specially designed gearboxes  
 It is resistant to sudden loads.  
 If it is not oil-free, it will not deteriorate.

Contemporary Design,  
 Modern Product...



10M3  
 5M3



FIELD TYPE





AGROMEKS

# PANTER

## SOLID MANURE SPREADER



Model	Model	PANTER-5	PANTER-10
Uzunluk	Length	606 cm	725 cm
Genişlik	Width	210 cm	210 cm
Yükseklik	Height	230 cm	240 cm
Ağırlık	Weight	2940 kg	3900 kg
Konveyör	Conveyor	Hidrolik-Hydraulic	Hidrolik- Hydraulic
Kapasite m3	Capacity (m3)	5 m3	10 m3
Kapasite Ton	Capacity (ton)	7 ton	12 ton
Helezon Hareketi	Spiral movement	Kuyruk Mili-PTO	Kuyruk Mili- PTO
Helezon Şanzuman Sayısı	Spiral transmission number	2	2
Konveyör Şanzuman Sayısı	Conveyor transmission number	1	1
Emniyet Sistemi	Security system	Balatalı Şaft-Slip shaft	Balatalı Şaft-Slip shaft
Helezon Sayısı	Beaters number	2	2
Konveyör Tipi	Conveyor type	12 mm Isıl İşlemli Zincir Heat treated chain	12 mm Isıl İşlemli Zincir Heat treated chain
Dingil Tipi	Axle type	Tek Dingil Single axle	Çift Dingil / Tandem Makas Double axle / Tandem scissors
Lastik Boyutu	Tire size	400/60-15,5	400/60-15,5
Minimum Gerekli Güç	Minimum required power	55 HP	75 HP
Kuyruk Mili Devri	Tail shaft rotation	540	540
Gübre Dağıtma Genişliği	Manure spreading width	5-15 m	5-15 m
Garanti Süresi	Warranty period	2 Years	2 Yıl

agromeks

# CARETTA BEACH CLEANER

GREEN TECHNOLOGY

GREENWORLD!

Our Beach Cleaning Machines have a working depth of 15 cm and a working width of 140 cm.  
Thanks to the special sieve system working with vibration, it collects cigarette butts, garbage, stones etc. on the beaches.  
In addition to the cleaning function, it provides the smoothing and arrangement of the surfaces of the beaches.  
It has a storage capacity of 350 liters.  
It cleans an average of 7.000m<sup>2</sup> area per hour.  
Our galvanized coated materials protect the machine from factors such as salt and moisture.



Cigarette butts, stones and all kinds of garbage material.  
Levels the floor while thoroughly cleaning.



FINAL SOLUTION FOR BEACHES



HYDRAULIC LIFT STORAGE

Hydraulic lift storage  
350lt capacity and  
Has a unload height of 2 meters



VIBRATION SIEVE SYSTEM

Long-lasting machine resistant to  
moisture and salt  
thanks to its galvanized zinc coating  
and vibrating sieve system.

CONTEMPORARY DESIGN,  
MODERN PRODUCT...




CLEAN ENVIRONMENT

CLEAN LIFE!

  
agromeks



AGROMEKS



# CARETTA BEACH CLEANER



Traktör Gücü	Tractor power	50-60 HP 4 çeker-pulls
Kapasite	Capacity	6822/7500 m2/saat-hour
Temizlik Derinliği	Cleaning depth	15 cm
Temizleme Genişliği	Cleaning width	140 cm
Çalışma Sistemi	Working system	Vibrasyonlu Eleme Sistemi Vibrating screening system
Depo Kapasitesi	Storage capacity	350 lt
Boşaltma Yüksekliği	Discharge height	180-200 cm
Boyutları	Dimensions	220x160x155 cm
Ağırlık	Weight	560 kg

# PARS MULCHER AND COLLECTOR

GREEN TECHNOLOGY

GREEN WORLD!

With Agromeks Mulcher and Collector Machine; "end" unwanted branches in orchards, "hello!" to manure and bio energy recycling! Branch mulcher and collector machine, with its 175cm working width, is suitable for fruit gardens, greenhouses, etc. It ensures that diseased pruned branches in the fields are easily collected and stored away.



HYDROMOTOR COLLECTOR SYSTEM

175cm working width  
20 Collector foot  
34 shredder blades.



HYDRAULIC LIFTING BIGBAG

The hydraulic lift bigbag system allows height adjustment according to the size of the land and the bag.



UNLOAD TO TRAILER SYSTEM (OPTIONAL)

Thanks to the easy-to-change trailer unloading apparatus, a trailer can be connected to the machine, as in forage harvesters.

Branches with a diameter of 3cm-20cm  
Pieces to 3-10 cm in size.



CLEAN ENVIRONMENT

CLEAN LIFE!





AGROMEKS



PARS

## MULCHER AND COLLECTOR

Working Width	175cm
Path Width	180cm
Length	230cm
Min Height	215cm
Max Height	265cm
Weight	1200kg
PTO	540rpm
Rotor RPM	1800-2000rpm
Tractor Speed	5-10 km/hr
Hydraulic Type	Tractor
Min. HP	Min 55 HP
Crusher Blade Type	Hammer
Number of Crusher Blade	20
Crusher Rotor Widht	140cm
Tires	16,5x6,5-80
Big Bag Properties	100x100x120cm
Warranty Period	2 Years

  
agromeks

# PANTER

## SOLID MANURE SPREADER

### GREEN TECHNOLOGY

Solid Manure Spreaders provide homogeneous distribution of animal solid manure to the fields.  
 Our 4<sup>3</sup> and 6<sup>3</sup> models have a capacity of 5 tons and 7 tons.  
 Thanks to the specially designed single axle tandem scissor system, provides low fuel consumption, easy driving and use, even in tractors with low horsepower, work without overload on the tractor.

Thanks to the right, left and rear throw adjustable covers, can be adjusted pitch up to 6 meters at the desired distance to the desired side.

Thanks to its minimal design, it provides the opportunity to work in orchards, greenhouses and vineyards.  
 Thanks to the hydraulic piston in the front tractor connection arrow, maneuverability is high in narrow spaces between rows.



### GREEN WORLD!

Possibility of throwing at the desired distance to the desired side thanks to the closing and opening step-adjustable side covers and the hydraulically opening and closing rear cover.



DIRECTION AND DISTANCE ADJUSTABLE THROW SYSTEM



Double tray dispensers provide spreading up to 6 meters.

DOUBLE TRAY DISPENSER SYSTEM



Our specially designed gearboxes  
 It is resistant to sudden loads.  
 If it is not oil-free, it will not deteriorate.

POWERFUL TRANSMISSION, POWERFUL MACHINE!

CONTEMPORARY DESIGN,  
 MODERN PRODUCT...



GARDEN TYPE

4M<sup>3</sup>  
 6M<sup>3</sup>





AGROMEKS

# PANTER

## SOLID MANURE SPREADER



MODEL	PANTER-4	PANTER-6
Length	500 CM	500 CM
Width	200 CM	200 CM
Height	180 CM	215 CM
Weight	2200 KG	2500 KG
Conveyor	Hydraulic	Hydraulic
Capacity (m <sup>3</sup> )	4 m <sup>3</sup>	6 m <sup>3</sup>
Capacity (ton)	5	7
Spiral Movement	PTO	PTO
Spiral Transmission Pcs.	3	3
Conveyor Transmission Pcs.	1	1
Security System	Pad Shaft	Pad Shaft
Spiral Pcs	2	2
Conveyor Type	12mm Heat Treatment Chain	12mm Heat Treatment Chain
Axle Type	One Axle	One Axle
Tyre Size	10.0/75-15,3	10.0/75-15,3
Minimum Required HP	50 HP	50 HP
PTO	540	540
Trow Longs	5-15 M	5-15 M



# MIRKET TRENCHER

## GREEN TECHNOLOGY

## GREEN WORLD!

PE, PVC, coil etc. used in drip irrigation. It is used to open the channels of pipes buried underground.  
Especially where construction machines cannot enter;

Vineyards and works between rows in gardens without damaging the branches and plant roots.

Specially designed chain diggers with 21 pairs and 42 blades in total provide fast digging while offering long blade life.


It has a digging depth of up to 70cm and a digging width of 20cm.

It digs at a depth of up to 50cm at 300m per hour, and at a depth of 50-70cm at 150m per hour.

Minimum required tractor power is 70hp.



42 digger blade system with Hardox material,  
While it can dig up to 70cm deep;  
Thanks to its architecture and uses  
It cannot force the toughest terrain.

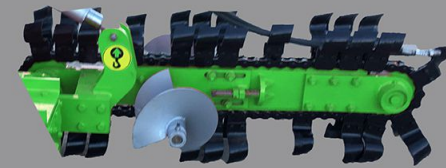


42 BLADE TRENCHER SYSTEM

The diged soil is removed from  
the excavation sequence by means of  
the soil conveyor augers located on  
both sides of the machine.



SOIL MOVER CONVEYORS

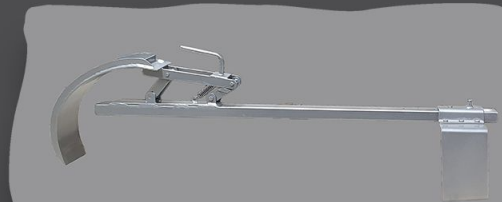

COLLAPSIBLE PROTECTIVE CHAMBER

Protective chamber  
Can fly while digging  
Possible stone etc. your bodies  
Prevents scattering

FOR FARM  
&

INDUSTRIAL

WITH HARDOX  
WEAR PLATE...

**HARDOX**<sup>®</sup>  
WEAR PLATE







AGROMEKS

 **MIRKET**  
TRENCHER

Working Width	20cm
Working Depth (Max.)	70cm
Working Speed (max. 50cm Depth)	300 m/hr
Working Speed (50-70cm Depth)	150 m/hr
Required Minimum Tractor HP	70hp
Weight	950kg



  
agromeks



# agromeks

• TAŞ TOPLAMA • TAŞ KIRMA • KATI GÜBRE RÖMÖRKÜ

## TARIM MAKİNALARI



agromeks





AGROMEKS



**Showroom;**  
Yeni Mahalle.  
Yeni İstanbul Caddesi.  
No:3391 Akşehir/Konya  
TURKEY

WhatsApp +90 850 242 44 45  
+90 332 225 44 45  
[www.agromeks.com](http://www.agromeks.com)  
[sales@agromeks.com](mailto:sales@agromeks.com)

**Factory;**  
Reis Mahallesi. Akşehir.  
Organize Sanayi Bölgesi.  
3. Sokak. No:18 Akşehir/Konya  
TURKEY